

F3

SS816TW/TC



The FREZNO 150 TW/TC is a compact, lightweight LED Fresnel with high efficiency and CRI. Pure color temperature, built-in 0-100% dimmer, Beam angle 10°-50° (Manual control) , Field angle 18°-75° , simple and quick adjustment for choosing beam Angle base to different distances and locations, manual CCT button on body, FREZNO 150 TW with Tunable CCT 2700k -4500k, FREZNO 150 TC with Tunable CCT 4000k -6500k, this model is designed for theater, television, cultural centers, studio, multi-function meeting rooms and other small and medium applications.



PRODUCT PARAMETERS

Optical system

Light source100W

Beam angle10°-50° (Manual control)

Luminous flux4781lm/5016lm

Field angle18°-75°

CCT

TW-3200K(2700K-4500K range)
TC-5600K(4000K-6500K range)

CRI/CQS

Ra>90;CQS>90

Appearance

Size321x274x363mm

CasingDie-cast aluminum

Weight5.3kg

ColorBlack

Electrical Specs

Voltage

100-240VAC,50/60Hz

Max. Power

120W

Power Connection

Power in and out

DMX XLR

3pin or 5pin in and out

Control System

Dimmer

0-100% 16Bit

Cooling

Forced Convection

Control

DMX512、RDM

Con Personality

UNO/1CHS、DOS/2CHS、VW.D/3CHS、VW.F/6CHS、STD.P/8CHS

Display

On board Control , Custom Mode , 0-25Hz Strobe, Dimming knob

Work Environment

Ambient Temp

0°C-45°C

IP Rated





IP20

Certification


CE、MET

ILLUMINANCE AT DISTANCE


SS816TW/TC

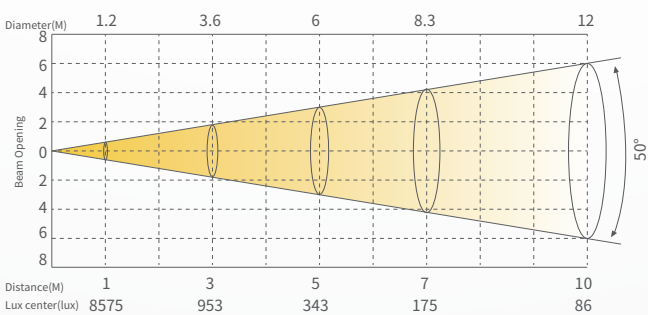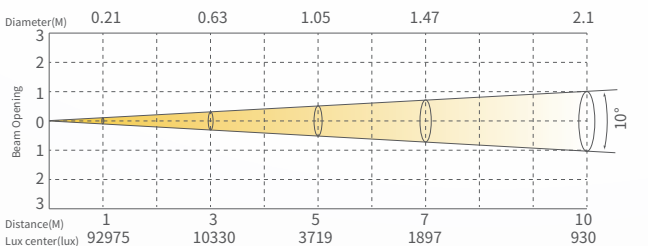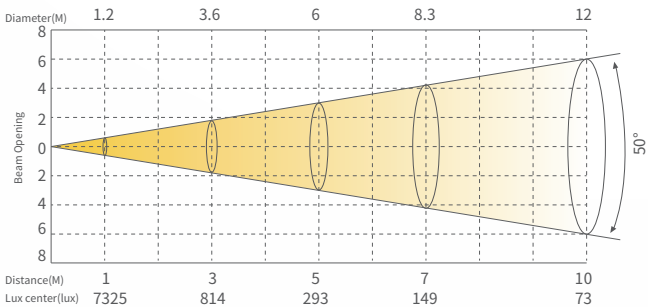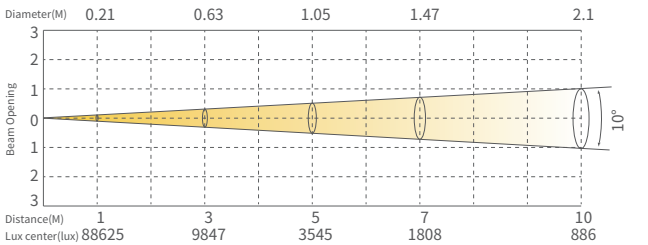


DIMENSIONS

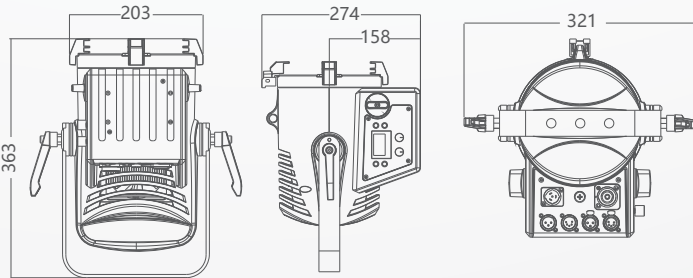

ACCESSORIES(Accessories not included unless otherwise stated)



Barn doors
(2440010677、6813000324)



Short hat
(2440501465)