

F4

SS820TWM/TCM



AURORA 150 TW/TC comes with innovative 150W LED module, Tungsten and Daylight for optional, one-sided light output. CRI>95Ra, supports for DMX512 and RDM, perfects for the installation. It is an ideal Par for TV, studio, exhibition, multi-functional hall, theater, opera, and so on.



PRODUCT PARAMETERS

Optical system

Light source150W

Angle16° (25°optional)

Luminous flux
7255lm

CCT
TW-3200K(2700K-4200K range)
TC-5600K(4000K-6000K range)

CRI
Ra≥93

Appearance

Size320x217x418mm

WeightDie-cast aluminum

Casing6.5kg

ColorBlack

Electrical Specs

Voltage
100-240VAC,50/ 60Hz

Max. Power
143W

Power Connection
Power in and out

DMX XLR
DMX Splitter in/out

Control System

Dimmer
0-100%16Bit

Cooling
Forced Convection

Control
DMX512、RDM

Display
On board Control , Custom Mode , 0-25Hz Strobe

Con Personality
UNO(1CHS)、DOS(2CHS)、VW.D(3CHS)、
VW.F(6CHS)、STD.P(8CHS)

Work Environment


Ambient Temp
-20°C-45°C

IP Rated
IP65


Certification

CE、MET


ILLUMINANCE AT DISTANCE
SS820TWM

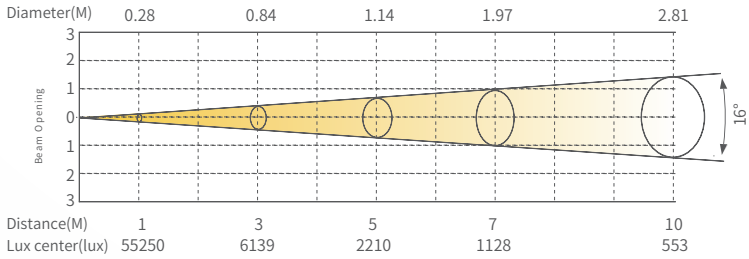

SS820TCM

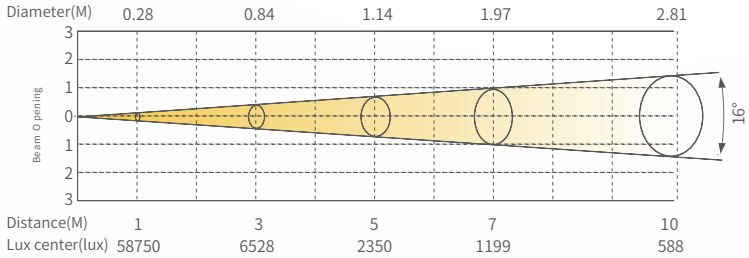

DIMENSIONS

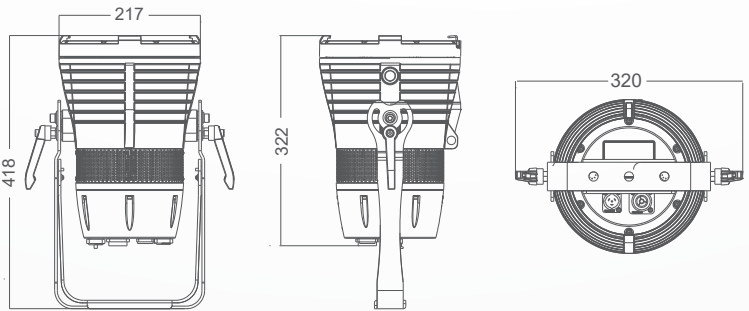

ACCESSORIES (Accessories not included unless otherwise stated)

