

E6

SS837SW HD/SC HD



The ECLIPSE 400 HD is a new professional with high density integrated source, 50% brighter than the 1st great successful version, can match exactly professional lens with different degree. Shaping, logo projection is crystal clear, color rendering>90, perfect for theatre, studio, banquet halls and TV stations.



PRODUCT PARAMETERS

Optical system

Light source
400W
Angle
5°/10°/14°/19°/26°/36°/50°/15°-30°/25°-50°

Luminous flux
17861lm(26°)/2031lm

CCT
3200K/5600K

CRI
Ra≥90

Appearance

Size 740x198x224mm Casing Die-cast aluminum
Weight 9.2kg Color Black

Electrical Specs

Voltage
100-240VAC,50/60Hz

Max. Power
360W

Power Connection
Power in and out

DMX XLR
DMX in and out

Control System

Dimmer
0-100% 16Bit

Cooling
Forced Convection

Control
DMX512, RDM

Display
On board Control, 0-25Hz Strobe

Con Personality
UNO(1CHS)、DOS(2CHS)、STD.P(3CHS)

Work Environment



Ambient Temp
0°C-45°C

IP Rated
IP20


Certification

CE、MET


DIMENSIONS

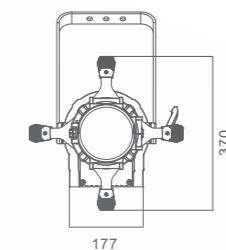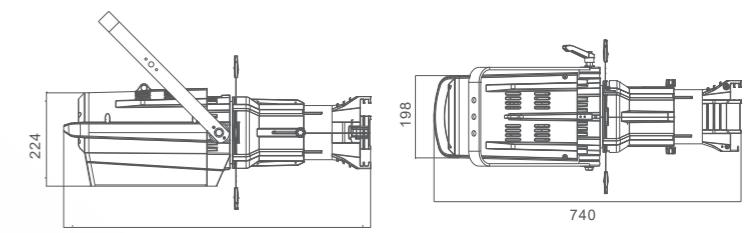


ACCESSORIES (Accessories not included unless otherwise stated)




The focusing barrel(5°)
(6813100050)




Zoom barrel(15°-30°)
(6813100008)




Aperture
(6840000001)




The focusing barrel(10°)
(6813100031)




The focusing barrel(14°)
(6813000311)




Zoom barrel(25°-50°)
(6813100007)



Glass gobo holder
Metal gobo holder
(e19° 6813100003)
(e26° 6813100002)
(e33° 6813100004)
(e50° 6813100005)



Lens barrel
(e19° 6813100003)
(e26° 6813100002)
(e33° 6813100004)
(e50° 6813100005)



6/1 Flightcase
(Fixture + Fixed lens barrel)
(1320400143)