

# EC6

## SS5154XH



EC6 is a compact and lightweight 6 colors profile, with uniform color mixing, clear projection. Equipped with intelligent color management system CCS, to ensure the color consistency. Built-in 1800-10000K high CRI CCT and 48 common used colors. Its integrated structural design, holding the sharp shutter framing system, and manual zoom 25-50°. It is perfect for theaters, multi-functional hall, church, conference room, and TV stations applications etc.



### PRODUCT PARAMETERS

#### Optical system

Light source  
200W RGBALC

Luminous flux  
7768lm

Angle  
25-50°

CTO  
1800K-10000K

CRI Ra  
97

#### Appearance

Size 568x224x191mm Casing Flame-retardant plastic (V0)

Weight 5.84kg Color Black

#### Electrical Specs

Voltage  
100-240VAC, 50/60Hz

Rated Power  
200W

Power Connection  
power in and out

DMX XLR  
3pin or 5pin in and out

#### Control System

Dimmer  
0-100% 16Bit

Cooling  
Forced Convection

Control  
DMX/RDM

Display  
On board Control, 0-25Hz Strobe

Con Personality  
BASIC (3CHS) , SSP(7CHS), TOUR(12CHS), TR16(18CHS), HSIC(7CHS), CMY(10CHS)

Framing system  
4 blades, manual shutter



#### Work Environment

Ambient Temp  
0°C-45°C


IP Rated  
IP20

CE, MET

### ILLUMINANCE AT DISTANCE

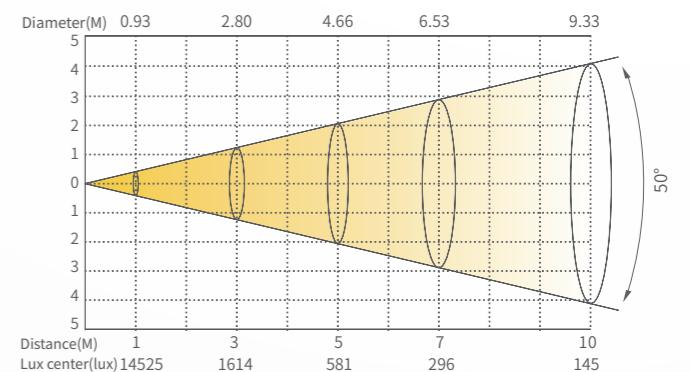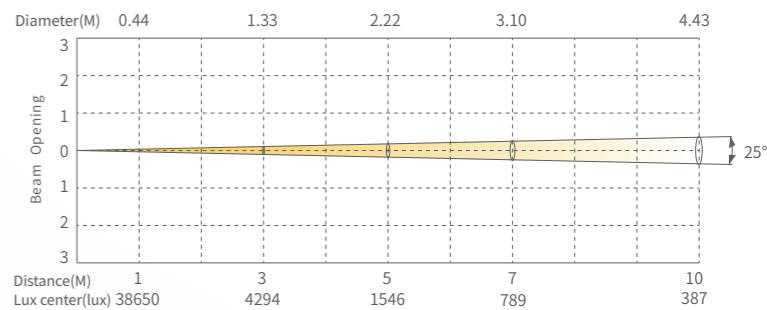


### DIMENSIONS



### ACCESSORIES (Accessories not included unless otherwise stated)

#### 1. gobo holder

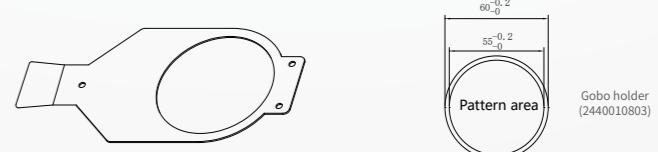

#### 2. honey comb

