

N one-X

SS9464SCM

Neptune N one-X is an excellent IP66 moving profile with efficient optical system, CMY professional color mixing system,17 times optical zoom, optical Angle 3°-52°. X/Y is faster and more accurate. Gobo switching function is fast and sensitive. Instantly switch a rich and colorful gobo effect, bringing vividly performance to the audience. Suitable for both indoor and outdoor .It is a perfect product for theater, concert, theme park, amusement venues, etc.



PRODUCT PARAMETERS

Optical system

Angle	3°-52°
Luminous flux	13100lm
illuminance	5m@120,000lux(3°)
CRI	RA:70

Appearance

Size	362*234*624mm	Casing	Die casting magnesium aluminum
Weight	27.2KG	Color	black

Electrical Specs

Voltage	100-240VAC,50/60Hz	Max. Power	550W
Power Connection	Power input and output	Signal socket	3pin and 5pin in and out

Control System

Pan/Tilt rotation	
Infinite Pan/Tilt 270°(8-16bit)	
dimming	
Opera dimming effect (0-100% 24Bit dimming)	
Control protocol	Cooling system
DMX/RDM//NFC/W-DMX (optional)	Air cooling
Functional effect	
Display board control static, custom mode, 0-25Hz stroboscopic	
Channel mode	
BASIC(34CH)/STANDARD(41CH)/EXTEND(55CH)	

Effect synthetic system

CMYK	Colors
CMY+CTO	6+1 color piece

Rotating pattern
7 rotating pattern pieces + white light, pattern flow effect, positive and negative rotation

Animation Wheel
Bi-directional rotation,Speed adjustable

Iris
5-100% linearly adjustable with macro

prism1
One 8 facet prism, Bi-directional rotation,Speed adjustable

prism2
One 6 linear prism
2 Frosts
Light+Heavy

Framing system
4 cutting pieces, smooth cutting, cutting direction and Angle of each cutting piece can be independently controlled; The single piece can be completely closed, and the entire cutting module can be rotated ±90°

Work Environment

Ambient Temp
-20°C-45°C



IP Rated
IP66

Certification

CE

ILLUMINANCE AT DISTANCE

SS9464SCM

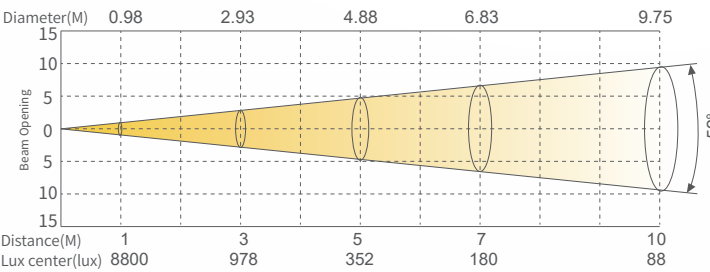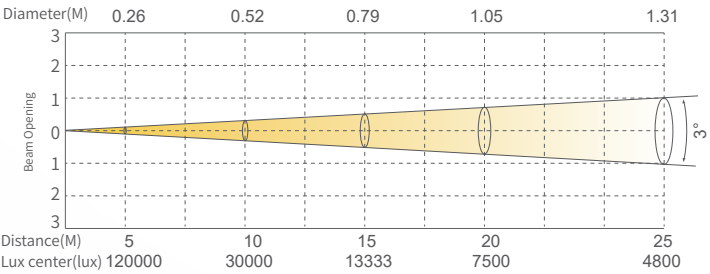

ROTATION GOBO



Framing system



Animation Wheel



Colors



CMY



DIMENSIONS

