

# N8

## SS9483SCM

N8 is a 650W LED Moving head, with beam, framing, spot, washing all in one. On the basis of the original N7, the newly upgraded optical Angle is 6°-50°, illuminance up to 11,3000 lux at 5 meters on the minimum angle. The tilt movement speed is increased to 1.5 seconds per Round, with NFC can connect the fixture quickly and set the basic function very easily by the YJNFC app, the linear CMYK color mixing system provides rich color saturation, the adjustable linear CTO color temperature, and the professional framing system can cut out any sharp projection. Dynamic animation wheel can be created with water and fire effects. Designed to provide the best choice for venues such as theater, TV stations, concerts and rental shows.



### PRODUCT PARAMETERS

#### Optical system

Light source 650W Angle 6°-50°  
illuminance 5m@11,3000lux

#### Appearance

Size 416x364x728mm Casing Flame-retardant plastic (VO), Die-cast aluminum  
Weight 34KG Color black

#### Electrical Specs

Voltage 100-240VAC Max. Power 800W  
Power Connection Power in and out Signal socket 3pin or 5 pin in and out, RJ45 in and out

#### Control System

Pan/Tilt rotation 540°/270°(8-16bit)  
Dimmer 0-100% 16Bit Cooling Direct Convection  
Control DMX/RDM/ARTNET/SACN/CRMX(Optional)/web server  
Display On Board Control, 0-25Hz Strobe  
Con Personality BASIC/35CHS, STANDARD/41CHS, Extend/44CHS

#### Effect synthetic system


Rotating Gobo 7 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation  
Static Gobo 10 + 1 Gobos Animation Wheel 1 animation wheel  
CMYK CMY, CTO Colors One color wheel(6 dichroic-filters+White, Rainbow-flow effect)  
Prism One piece of 4 F prism with bi-direction rotation, Speed adjustable  
Iris 5-100% linearly adjustable with macro  
Zoom Motorized linear Zoom Focus Motorized linear focus  
Frost (light+medium) 2Frost filter  
Framing system 4 shutter blade, Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±45°

#### Work Environment      Certification

Ambient Temp -20°C-45°C  
IP Rated IP66

### ILLUMINANCE AT DISTANCE

#### SS9483SCM

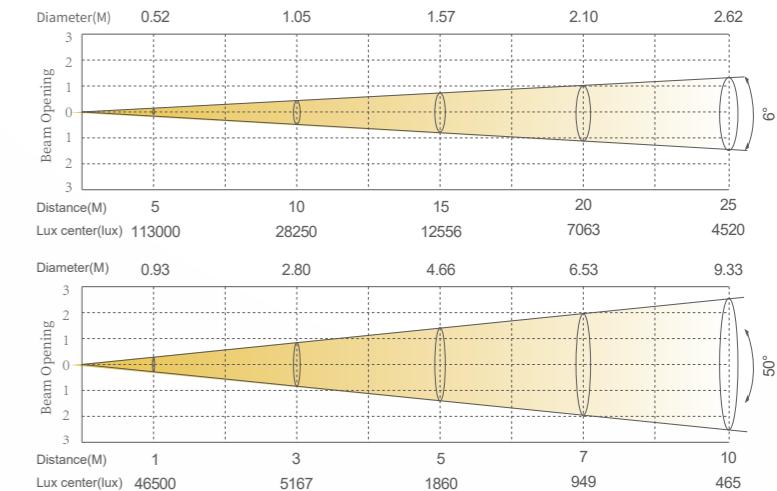

#### FIXED GOBO



#### Colors




#### Rotation Gobo



#### CMY+C TO




#### Framing system

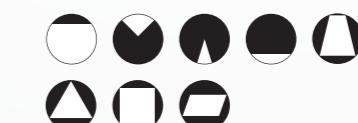


#### Animation Wheel



#### DIMENSIONS

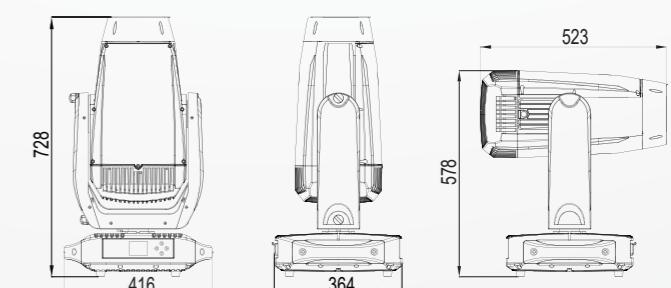

#### ACCESSORIES (Accessories not included unless otherwise stated)



Flight case  
(1320400259)

Wireless receiving module  
(2440010465)

