

# T10 FC

## SS9284FC

PLUTO 1300 PROFILE Wash is a high-power professional LED profile wash, with 5.5°-50° Electronic zoom system. Precise X/Y positioning, with professional framing system can cut out any polygon, and with frost and iris. It is designed for the theatres, cultural center, function hall, banquet hall, as well as rental performance market.



### PRODUCT PARAMETERS

#### Optical system

Light source	1000W module	Beam Angle	5.5-36°
luminous flux	139121lm	Field Angle	11.5-50°
CRI	Ra.93 R9.95	Illuminance	5M@13341lux(5.5°)

#### Appearance

Size	483X283X746mm	Casing	Flame-retardant plastic (V0)
Weight	35.5KG	Color	Black

#### Electrical Specs

Voltage	Max. Power
100-240VAC,50/60Hz	1300W
Power Connection	Signal socket
power in	3pin or 5pin in and out, RJ45 in and out

#### Control System

Pan/Tilt rotation	Cooling
540°/270°(8-16bit)	Forced Convection
Dimmer	
0-100%16Bit	
Display	
On board Control, Custom Mode,0-25Hz Strobe	
Control	
DMX512, RDM, Art-Net, sACN, W-DMX(optional)	
Con Personality	
BASIC(28CHS), STANDARD(33CHS), EXTEND(37CHS)	
Special	
Pan/Tilt movement blackout, User-selectable pan/tilt ranges	

#### Effect synthetic system

Colors	Two color wheel (7dichroic-filters+White, Rainbow-flow effect)
CMYK	CMYwheel, Linear CTO function
Framing system	4 shutter blade; Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±90°

#### Iris

5-100% linearly adjustable with macro

Focus	Zoom
Motorized linear focus	Motorized linear Zoom

#### Frost


2 new material frost filters(light & medium), can be used independent and overlay

#### Work Environment

Ambient Temp	Certification
0°C-45°C	CE, MET
IP Rated	
IP20	

### ILLUMINANCE AT DISTANCE

#### SS9284FC

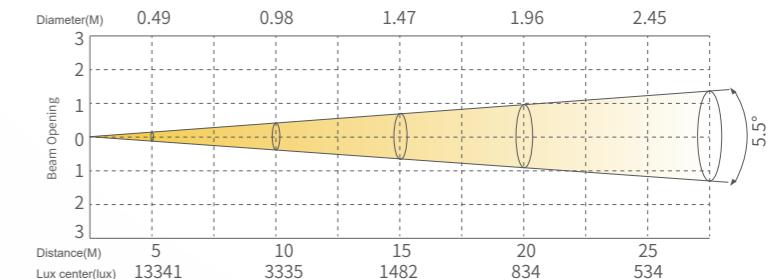

### COLORS




### CMY+CTO




### Framing System



### DIMENSIONS

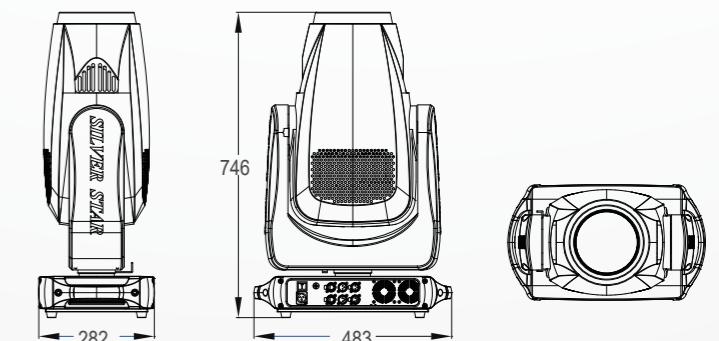

### ACCESSORIES (Accessories not included unless otherwise stated)



Wireless receiver Kit  
(2440010465)  
Flight Case  
(1320400243)