

F4

SS820TWM/TCM



AURORA 150 TW/TC comes with innovative 150W LED module, Tungsten and Daylight for optional, one-sided light output. CRI>95Ra, supports for DMX512 and RDM, perfects for the installation. It is an ideal Par for TV, studio, exhibition, multi-functional hall, theater, opera, and so on.



PRODUCT PARAMETERS

Optical system

Light source 150W Angle 16° (25° optional)

Luminous flux 7255lm

CCT TW-3200K(2700K-4200K range)
TC-5600K(4000K-6000K range)

CRI Ra≥93

Appearance

Size 320x217x418mm Weight Die-cast aluminum

Casing 6.5kg Color Black

Electrical Specs

Voltage 100-240VAC,50/60Hz

Max. Power 143W

Power Connection Power in and out

DMX XLR
DMX Splitter in/out

Control System

Dimmer 0-100%16Bit

Cooling Forced Convection

Control DMX512、RDM

Display On board Control , Custom Mode , 0-25Hz Strobe

Con Personality UNO(1CHS)、DOS(2CHS)、VW.D(3CHS)、
VW.F(6CHS)、STD.P(8CHS)

Work Environment


Ambient Temp -20°C-45°C

IP Rated IP65


Certification

CE、MET


ILLUMINANCE AT DISTANCE SS820TWM

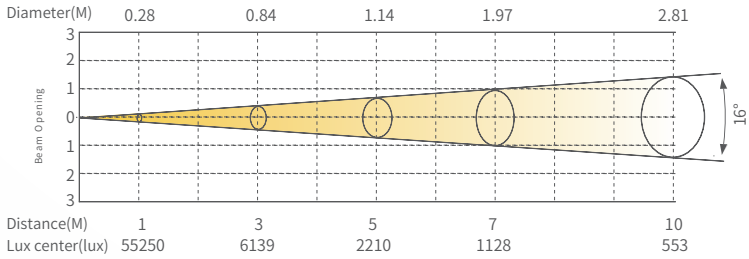

SS820TCM

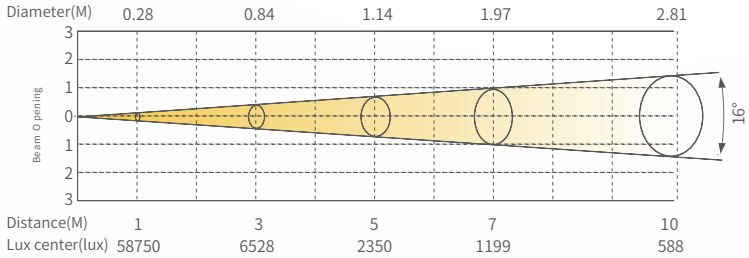

DIMENSIONS

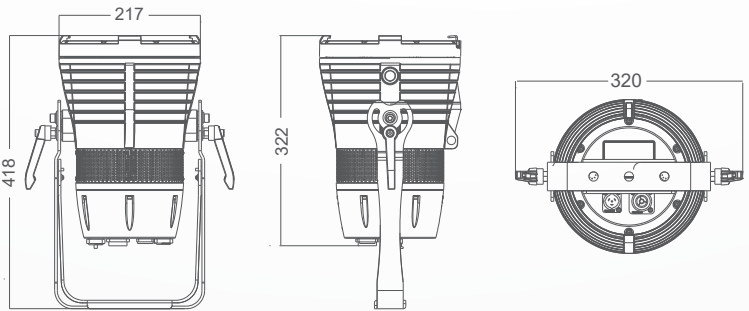

ACCESSORIES (Accessories not included unless otherwise stated)

