SP6
SS5552XHM

PLANO 300 HEX is a Hex color IP65 soft panel light, born to meet the harsh light quality requirements of the studio scene, with ultra-efficient optic, beautiful color mixing, uniform, even and elegant light. Equipped with uunique "CCS" technology, make sure the color consistency in each batch. Built-in 1800-10000K high CRI CCT, Superb smooth dimmer curve, 0-100% dimming flicker free. With NFC, Bluetooth quick parameter setting function, as well as an easy-operated USB port for upgrade software. The PLANO 300 HEX is ideal choice for outdoor photography, TV studio, theatre, concert, multifunctional hall and rental performance space.

PRODUCT PARAMETERS

Optical system

Light source
RGBALC

Luminous flux
16638lm

Beam angle	Field angle
62°	100°

CRI Ra/CRI R9/TLCI/CQS	CCT
96/97/91/94	1800-10000K

Appearance

Size 450x178x574 mm	Casing Extruded aluminum
Weight 11.5kg	Color Black

Electrical Specs

Voltage	Battery Input
AC100-240V	DC24-36V

Max. Power
300W

Power Connection
Power in and out

DMX XLR
3pin or 5pin in and out

Battery Connection
4pin XLR

Control System

Dimmer
0-100%16Bit

Cooling
Direct Convection

Display
BASIC/SSP/TOUR/TR16/HSIC/CMY

Control
DMX512、RDM、W-DMX（optional）、NFC、Bluetooth

Con Personality
UNO(1CHS)

Work Environment   Certification

Ambient Temp	CE、MET
-20℃-45℃	

IP Rated
IP65

ILLUMINANCE AT DISTANCE
SS5552XHM

Diameter(M)	1.20	3.61	6.01	8.41	12.02
Distance(M)	1	3	5	7	10
Lux center(lux)	10750	1194	430	219	108
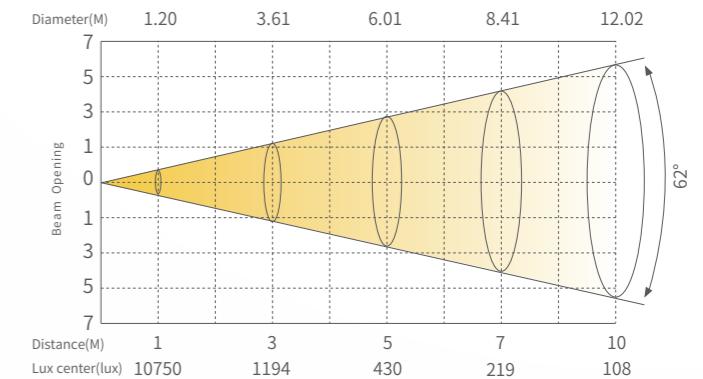
DIMENSIONS
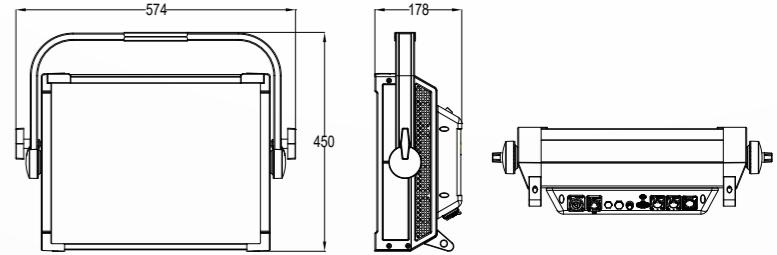
ACCESSORIES (Accessories not included unless otherwise stated)