

TF3

SS5421XWT

It is a new waterproof foot light with uniform color mixing, soft light for large coverage. The software carries the unique CCS3.0 intelligent color management system ensures the consistency of light color. Built-in 1800-10000 K linear adjustment of CCT and 24 kinds of commonly used colors. It is ideal tool for indoor auxiliary surface lighting, foot lighting applications, outdoor cultural and tourism performances, event and shows.



PRODUCT PARAMETERS

Optical system

Light source
R*36PCS, G*36PCS, B*36PCS, W*36PCS

Luminous flux
2671lm

Angle
72°

TYP. CRI
95

Appearance

Size 551x163x133mm Casing Die-cast Aluminum
Weight 7.5kg Color Black

Electrical Specs

Voltage
100-240VAC, 50/60Hz

Max. Power
70W

Power Connection
Power in/out

DMX XLR
DMX in/out

Control System

Dimmer
0-100% 16 Bit

Cooling
Direct convection

Protocol
RDM/DMX

Display
On board Control, Custom Mode, 0-25Hz Strobe

Personality
HSIC(7CH), SSP(7CH), TOUR(12CH), TR16(17CH),
BLOCK1(9CH), BLOCK2(15CH), CMY (10CH)


Work Environment

Ambient Temp
-20°C-45°C


IP Rated
IP66




ILLUMINANCE AT DISTANCE SS5421XWT

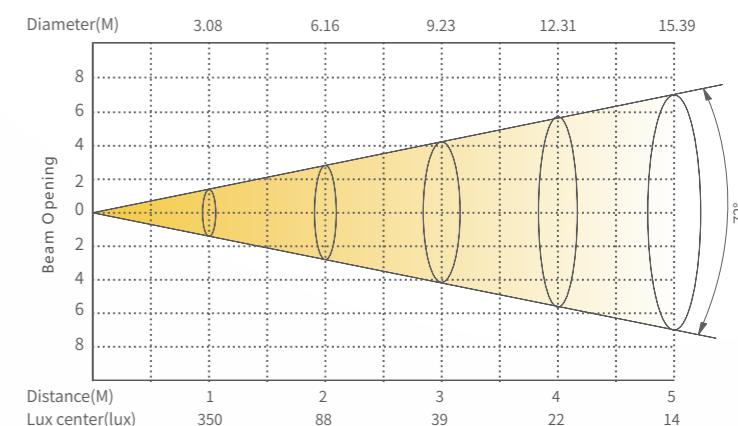

DIMENSIONS

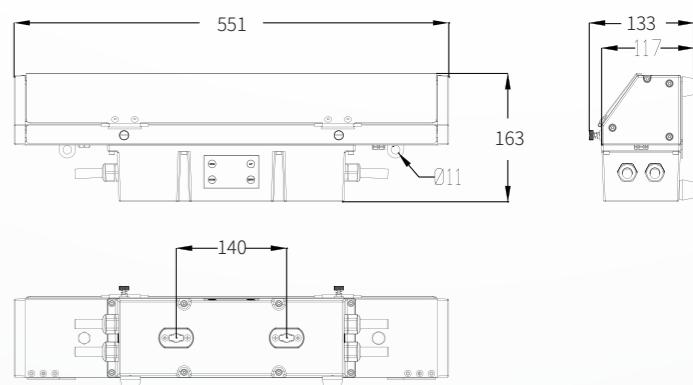

ACCESSORIES (Accessories not included unless otherwise stated)



Flight Case
(1320400258)