

NF9-X

SS9692XLEM



Equipped with a new-generation high-performance RGBL light source module, the Neptune Moving Head Wash Light NF9-X features an innovative Magic-face halo design. With a total power of 1800W and a zoom range of 3.5°-60°, it pioneers triple zoom technology to create rich washing effects. Supporting individual control of each lamp bead, it enables the creation of a wide variety of dynamic effects. Its exclusive M-face halo design delivers brilliant and dazzling visual performance.

The fixture is equipped with an X-axis stepless rotation system and a 24-bit dimming system, achieving ultimate dimming effects. It also comes with a digital color processing system, built-in selected color cards and full-range color temperature adjustment. Boasting an IP66 protection rating and a total weight of only 38kg, it is waterproof, dustproof and maintenance-free. This product is suitable for scenarios such as theaters, variety shows, TV stations, concerts, cultural and tourism projects, and outdoor lighting performances.



PRODUCT PARAMETERS

Optical system

Light source
32PCS*60W RGBL+RGBCW Ring

Fixture lumen
18000lm

Beam angle
3.5°-35°

Field angle
6°-60°

Appearance

Size 552x368x632mm Casing Die-cast aluminumplastic (V0)

Weight 38KG Color Black

Electrical Specs

Voltage
100-240VAC,50/60Hz

Max. Power
1800W

Power Connection
POWER In

Signal Socket
3pin or 5pin in and out, RJ45 in and out

Control System

Pan/Tilt rotation
Infinite Pan/Tilt 270°(8-16bit)

Dimmer
0-100% 24Bit

Cooling
Forced Convection

Control
DMX512, RDM, ARTNET, sACN, CRMX (optional) , NFC

Personality
HSIC(28CH)/SSP(21CH)/TOUR(33CH)/TR16(44CH)/CMY(32CH)/
PIXEL RGBL(154CH)/PIXEL Full(391CH)

Effect synthetic system

Led ring
Can present the rainbow effect

Effect Zoom

Individual Pixel Triple Zoom

Work Environment

Ambient Temp
-20°C-45°C


IP Rated
IP66

Certification

CE

ILLUMINANCE AT DISTANCE

SS9692XLEM

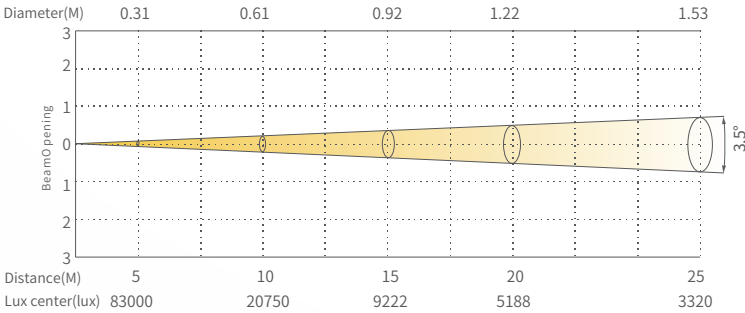

DIMENSIONS

